



भारतीय विज्ञान शिक्षा एवं अनुसंधान संस्थान तिरुपति

INDIAN INSTITUTE OF SCIENCE EDUCATION AND RESEARCH TIRUPATI

(An Autonomous Institute under Ministry of Human Resource Development, Govt. of India)
Transit Campus : Sree Rama Engineering College Campus, Karakambadi Road,
Mangalam B.O., Tirupati – 517 507, Andhra Pradesh, India.

NIQ No: 05/IISER/Tirupati/NIQ/2021-22

Date: 26.07.2021

Notice Inviting Quotation

Sealed quotations are hereby invited by the undersigned on behalf of the Director, IISER Tirupati for the work mentioned below upto 3:00 PM on 02/08/2021 from eligible contractors agencies with similar works experience. The quotations will be opened at 3:30 PM on the same day.


Name of work: Providing & fixing of Aluminium partition & painting in Hostel & UG laboratory of IISER Tirupati Permanent campus, Yerpedu.

Terms and Conditions:

- 1) No advance payment shall be made by IISER Tirupati.
- 2) Time period for completion of work shall be **10 days** from the date of placing the confirm order by IISER Tirupati. The act of backing-out after quotation will debar such agencies for participating in future quotations of IISER Tirupati. Bidder may e-mail queries on engineering@iisertirupati.ac.in or submit to IISER Tirupati office in hard copy on all working days before a day of submission date of quotation.
- 3) Blank Quotation can be obtained from IISER Tirupati website <http://www.iisertirupati.ac.in/tenders/>
- 4) All agencies need to submit their quotation in hard copy in a sealed envelope to this office by suitable means on and before 3 PM on 02/08/2021. Quotation received after the date & time specified above shall not be accepted. Any delays, postal delay etc. will not be entertained. Agency should quote for all the items in the BOQ. The bid shall be submitted in the original bid document (as issued by the IISER Tirupati) super scribing the name of work. Quotations will be opened on the same day i.e., 02/08/2021 at 3:30 PM in the presence of bidder or their authorized representatives, if any. The offer of the firm should be commercially clear including acceptance of all terms and conditions without assigning any reasons.
- 5) Quoted rates should be inclusive of cost of all the materials, labour cost, taxes, duties, cost of sample and fees towards testing of materials in labs, royalties etc. complete. Nothing extra shall be paid.
- 6) All approved makes shall be as specified in BOQ and as per CPWD specifications, agency should put-up technical data and obtain prior approval on makes of various materials of IISER Tirupati before taking-up work.



- 7) The successful agency shall make his own arrangement for all Tools & tackles for work etc. complete in view of completion of work. Electricity shall be provided free of cost to agency at one source, agency should make own arrangement to safely tap of power from source to work location.
- 8) TDS and other applicable taxes and cess will be deducted from the bills as of the work.
- 9) Specification for the work to be carried out as per BOQ, latest CPWD specification, IS specifications & as per instruction of IISER Tirupati wherever CPWD/ IS specification are not available.
- 10) The contractor shall ensure that minimum wages should be paid to the labour's and employees in accordance with labour laws.
- 11) Agency to submit computerized measurement and abstract sheets to IISER Tirupati for payments.
- 12) Amount quoted for items should be as specified in the BOQ.
- 13) Following the latest developments and restrictions imposed in the country and state in view of the COVID-19, the agency should have strict compliance towards the rules and precautionary measures mentioned in the orders issued by the State Government from time to time. The submission of bids should be in the tender box placed at main gate of Institute. Also, successful agency should ensure all safety precautions, social distancing norms during the execution of work.

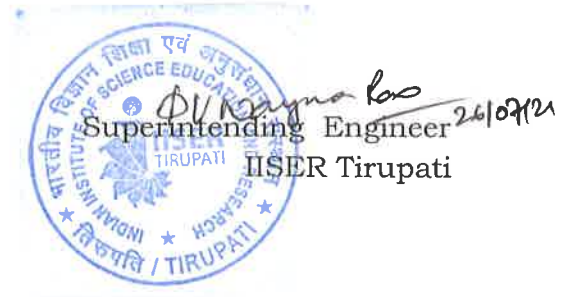

Sign & stamp of Agency-

Encl : - Schedule of Quantity – As per Annexure A.

Annexure A

Name of Work: Providing & fixing of Aluminium partition & painting in Hostel & UG laboratory of IISER Tirupati Permanent campus, Yerpedu

S.No.	Description of work	Qty	unit	Rate	Amount
1	Providing and fixing aluminium work for doors, windows, ventilators and partitions with extruded built up standard tubular sections/appropriate Z sections and other sections of approved make conforming to IS: 733 and IS: 1285, fixing with dash fasteners of required dia and size, including necessary filling up the gaps at junctions, i.e. at top, bottom and sides with required EPDM rubber/ neoprene gasket etc. Aluminium sections shall be smooth, rust free, straight, mitred and jointed mechanically wherever required including cleat angle, Aluminium snap beading for glazing / paneling, C.P. brass / stainless steel screws, all complete as per architectural drawings and the directions of Engineer-in-charge. (Glazing, paneling and dash fasteners to be paid for separately) :				
a	For Fixed Portion : Anodised aluminium (anodised transparent or dyed to required shade according to IS: 1868, Minimum anodic coating of grade AC 15)	435	kg		
b	For shutters of doors, windows & ventilators including providing and fixing hinges/ pivots/handles/rollers for sliding doors and making provision for fixing of fittings wherever required including the cost of EPDM rubber / neoprene gasket required (Fittings shall be paid for separately) - Anodised aluminium (anodised transparent or dyed to required shade according to IS: 1868, Minimum anodic coating of grade AC 15)	65	kg		
2	Providing and fixing 12 mm thick prelaminated particle board flat pressed three layer or graded wood particle board conforming to IS:12823 Grade I Type II, in panelling fixed in aluminum doors, windows shutters and partition frames with C.P. brass / stainless steel screws etc. complete as per architectural drawings and directions of engineer-in-charge. Pre-laminated particle board with decorative lamination on both sides	75	sqm		
3	Providing and fixing glazing in aluminium door, window, ventilator shutters and partitions etc. with EPDM rubber / neoprene gasket etc. complete as per the architectural drawings and the directions of engineer-in-charge . (Cost of aluminium snap beading shall be paid in basic item): With float glass panes of 5 mm thickness (weight not less than 12.50 kg/ sqm)	46	sqm		
5	Providing and fixing aluminium tower bolts, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc. complete : 150x10 mm	7	each		
6	Providing and fixing Brass 100mm mortice latch and locks with 6 leaves with pair of handles(best make of approved quality) for aluminium doors including necessary cutting and making good etc; complete:	7	each		
7	Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete.	137	sqm		
8	Wall painting with Anti fungal- Anti Bacterial paint (Royal health shield/ equivalent) of approved brand and manufacture to give an even shade : Two or more coats on new work over an under coat of primer applied @0.75 ltr/10 sqm	137	sqm		
	Total				

