



NIQ No: 9/IISER/Tirupati/NIQ/2022-2023

Date: 28.12.2022

NOTICE INVITING QUOTATION

Item rate sealed quotation are invited by the undersigned on behalf of Director IISER Tirupati for the following work.


Sl. No	Name of Work	Time Allowed	Start Date of Bid	End Date & time of Bid	Opening Date & time of Bid
1	Repair of road at IISER Tirupati Transit Campus	02 Days	28 .12.2022	03.01.2023 at 03:00 p.m.	03.01.2023 at 03:30 p.m.

Quotation can be obtain from IISER Tirupati website

<http://www.iisertirupati.ac.in/tenders/>

TERMS AND CONDITIONS

- 1) No advance payment shall be made by IISER Tirupati.
- 2) Applicants quoting for this work should be a registered “**Civil Contractor**” in CPWD/ AP state PWD/ MES/ Railways/ Autonomous bodies, or should have executed civil works in any of the government organizations. The proof of a similar work experience should be submitted along with the quotation. **Agency must visit the site before quoting the NIQ for better understanding.**
- 3) Time period for completion of work shall be **02 Days** from the date of placing the confirmed order by IISER Tirupati. The act of backing-out after submitting the quotation will debar such agencies for participating in future tenders of IISER Tirupati for a period of three years. Bidder may e-mail queries on engineering@iisertirupati.ac.in or submit to the IISER Tirupati office in hard copy on all working days before a day of the submission date of quotation.
- 4) All agencies need to submit their quotation in hard copy in a sealed envelope to this office by suitable means on or before 3 PM on 03/01/2023. The quotation received after the date & time specified above shall not be accepted. Any delays, postal delays, etc. will not be entertained. Agency should quote for all the items in the BOQ. The bid shall be submitted in the original bid document (as issued by the IISER Tirupati) superscribing the name of work. Quotations will be opened on the same day i.e., 03/01/2023 at 3.30 PM in the presence of bidder or their authorized representatives

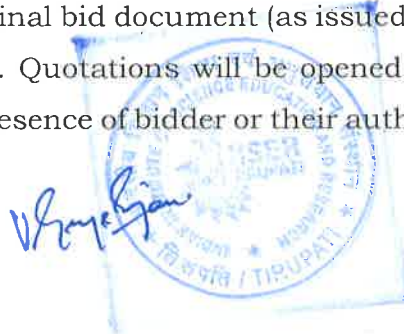




भारतीय विज्ञान शिक्षा एवं अनुसंधान संस्थान तिरुपति
INDIAN INSTITUTE OF SCIENCE EDUCATION AND RESEARCH TIRUPATI
(An Autonomous Institution of Ministry of Education, Govt. of India)
Transit Campus: C/o. Sree Rama Engineering College, Karakambadi Road,
Mangalam (P.O.), Tirupati, Andhra Pradesh – 517 507.

- if any. The offer of the firm should be commercially clear including acceptance of all terms and conditions without assigning any reasons.
- 5) Quoted rates should be inclusive of the cost of all the materials, labour cost, octroi, duties, cost of sample, and fees towards testing of materials in labs, royalties, GST, etc. Nothing extra shall be paid.
 - 6) All approved makes shall be as specified in BOQ and as per CPWD specifications, the agency should put-up technical data and obtain prior approval on makes of various materials of IISER Tirupati before taking-up work.
 - 7) The successful agency shall make its arrangement for all Tools & tackles for work etc. complete in view of completion of work. Electricity shall be provided free of cost to agency at one source, agency should make own arrangement to safely tap of power from source to work location.
 - 8) TDS and other applicable taxes and cess will be deducted from the bills as of the work.
 - 9) **Security Deposit @ 2.5%** shall be recovered at source and refunded after satisfactory completion of **DLP of (06) six months**.
 - 10) Specification for the work to be carried out as per BOQ, latest CPWD specification, IS specifications & as per instruction of IISER Tirupati wherever CPWD/ IS specification are not available.
 - 11) The contractor shall ensure that minimum wages should be paid to the labour's and employees in accordance with labour laws.
 - 12) Agency to submit computerized measurement and abstract sheets to IISER Tirupati for payments.
 - 13) Amount quoted for items should be as specified in the BOQ.
 - 14) Following the latest developments and restrictions imposed in the country and state in view of the COVID-19, successful agency should ensure all safety precautions, social distancing norms during the execution of work.


Executive Engineer, IISER Tirupati
On behalf of Director IISER, Tirupati



Copy to:

1. The Registrar, IISER Tirupati.
2. Deputy Registrar F & A.
3. Assistant Engineer Civil.



SCHEDULE OF QUANTITIES

Name of Work: Repair of Roads at IISERT Transit Campus

S. No.	Description of items	Unit	Qty	Rate	Amount
1	Preparation and consolidation of sub grade with power road roller of 8 to 12 tonne capacity after excavating earth to an average of 22.5 cm depth, dressing to camber and consolidating with road roller including making good the undulations etc. and re-rolling the sub grade and disposal of surplus earth with lead upto 50 metres.	Sqm	440		
2	Providing, laying, spreading and compacting graded stone aggregate (size range 53 mm to 0.075 mm) to wet mix macadam (WMM) specification including premixing the material with water at OMC in for all leads & lifts, laying in uniform layers with mechanical paver finisher in sub- base / base course on well prepared surface and compacting with vibratory roller of 8 to 10 tonne capacity to achieve the desired density, complete as per specifications and directions of Engineer-in-Charge.	cum	44		
				Total Rs.	

Total Amount in Words: _____

Note: -

- Amount quoted above shall be inclusive of GST, transportation, statutory, labour fees etc. nothing extra shall be payable.


Executive Engineer, IISER Tirupati
On behalf of Director IISER, Tirupati

(To be filled by the Agency)

Signature of the bidder :

Name of the Agency :

Mobile Number & E-mail ID :

Correspondence Address :