

NIQ No: 08/IISER/Tirupati/NIQ/2023-24

Date: 12.10.2023


NOTICE INVITING QUOTATION

Item rate sealed quotation are invited by the undersigned on behalf of the Director IISER Tirupati for the following work.

Sl. No	Name of Work	Time Period of contract	Start Date of Bid	End Date & time of Bid	Opening Date & time of Bid
1	Construction of Kho-Kho & Kabaddi courts at IISER Tirupati Permanent Campus, Yerpedu.	10 Days	12.10.2023	18.10.2023 at 03:00 p.m.	18.10.2023 at 03:30 p.m.

TERMS AND CONDITIONS

- 1) No advance payment shall be made by IISER Tirupati.
- 2) Applicants quoting for this work should be a registered “**Civil Contractor**” in CPWD/ AP state PWD/ MES/ Railways/ Autonomous bodies, or should have executed Civil works in any government organizations. The proof of a work experience should be submitted along with the quotation, without the proof of work experience the bids will be summarily rejected. **Agency must visit the site before quoting the NIQ for better understanding.**
- 3) Time period for completion of work shall be **10 Days** from the date of placing the confirmed order by IISER Tirupati. The act of backing-out after quotation will debar such agencies for participating in future quotations of IISER Tirupati. Bidder may e-mail queries on engineering@iisertirupati.ac.in or submit to the IISER Tirupati office in hard copy on all working days before a day of the submission date of quotation.
- 4) All agencies need to submit their quotation in hard copy in a sealed envelope to this office by suitable means on or before 3 PM on 18/10/2023. The quotation received after the date & time specified above shall not be accepted. Any delays, postal delays, etc. will not be entertained. Agency should quote for all the items in the BOQ. The bid shall be submitted in the original bid document (as issued by the IISER Tirupati) superscribing the name of work. Quotations will be opened on the same day i.e., 18/10/2023 at 3.30 PM in the presence of bidder or their authorized representatives if any. The offer of

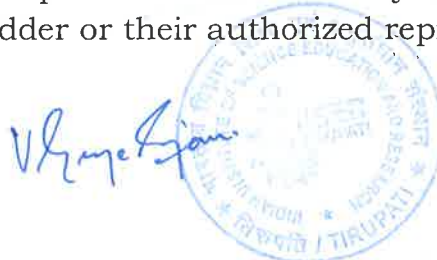



the firm should be commercially clear including acceptance of all terms and conditions without assigning any reasons.

- 5) Institute reserves the right to limit the BOQ quantity at any stage of the work as per the requirement and directions of the Engineer-in-Charge.
- 6) Quoted rates should be inclusive of the cost of all the materials, labour cost, octroi, duties, cost of sample, and fees towards testing of materials in labs, royalties, GST, etc. Nothing extra shall be paid.
- 7) All makes shall be as specified in BOQ /as per CPWD specifications. The agency should put-up technical data and obtain prior approval on makes of various materials from IISER Tirupati before taking-up work.
- 8) The successful agency shall make its arrangement for all Tools & tackles for work etc. complete in view of completion of work. Electricity shall be provided free of cost to agency at one source, agency should make own arrangement to safely tap of power from source to work location.
- 9) TDS and other applicable taxes and cess will be deducted from the bills as of the work.
- 10) Specification for the work to be carried out as per BOQ, latest CPWD specification, IS specifications & as per instruction of IISER Tirupati wherever CPWD/ IS specifications are not available.
- 11) The contractor shall ensure that minimum wages should be paid to the labour's and employees in accordance with labour laws.
- 12) **Security deposit @ 2.5 %** shall be recovered at source and refunded after satisfactory completion of **DLP of (06) six months**.
- 13) Agency to submit computerized measurement and abstract sheets to IISER Tirupati for payments.
- 14) Amount quoted for items should be as specified in the BOQ.



Executive Engineer, IISER Tirupati
On behalf of Director IISER, Tirupati

Copy to:

1. The Registrar's office, IISER Tirupati.
2. Deputy Registrar F&A.
3. Assistant Engineer Civil.

SCHEDULE OF QUANTITIES

Name of Work: Construction of Kho-Kho & Kabaddi courts at IISER Tirupati
 Permanent Campus, Yerpedu.

S.NO	Description of Item	Units	Qty	Rate	Amount
1	Earth work in excavation by mechanical means (Hydraulic excavator)/ manual means over areas (exceeding 20 cm in depth, 1.5 m in width as well as 10 sqm on plan) including getting out and disposal of excavated earth lead upto 50 m and lift upto 1.5 m, as directed by Engineer-in-charge.	Cum	240.00		
2	Providing and laying in position ready mixed or site batched design mix cement concrete for plain cement concrete work; using coarse aggregate and fine aggregate derived from natural sources, Portland Pozzolana/Ordinary Portland /Portland Slag cement, admixtures in recommended proportions as per IS:9103 to accelerate / retard setting of concrete, to improve durability and workability without impairing strength; including pumping of concrete to site of laying, curing, carriage for all leads; but excluding the cost of centering, shuttering and finishing as per direction of the engineer-in-charge; for the following grades of concrete	Cum	0.20		
	All works upto plinth level: Concrete of M15 grade with minimum cement content of 240 kg /cum				
3	Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20cm in depth, consolidating each deposited layer by ramming and watering, lead up to 50 m and lift upto 1.5 m.	Cum	120.00		
4	Supplying and filling of local earth (soft soil) by mechanical transport upto a lead of 50km also including	Cum	120.00		

V. Raju Kumar




भारतीय विज्ञान शिक्षा एवं अनुसंधान संस्थान तिरुपति
INDIAN INSTITUTE OF SCIENCE EDUCATION AND RESEARCH TIRUPATI
(An Autonomous Institution of Ministry of Education, Govt. of India)
Transit Campus: C/o. Sree Rama Engineering College, Karakambadi Road,
Mangalam (P.O.), Tirupati, Andhra Pradesh – 517 507.

	ramming and watering of the earth watering of the earth layer and rolling with power roller of minimum 8 tonnes and dressing not exceeding 15 cm in trenches, plinth, sides of foundation etc. complete				
				Total	

Total Amount in Words: _____

Note: -

- Amount quoted above shall be inclusive of GST, transportation, statutory, labour fees etc. nothing extra shall be payable.


28/10/23

Executive Engineer, IISER Tirupati
On behalf of Director IISER, Tirupati

(To be filled by the Agency)

Signature of the bidder :

Name of the Agency :

Mobile Number & E-mail ID :

Correspondence Address :