



भारतीय विज्ञान शिक्षा एवं अनुसंधान संस्थान तिरुपति
INDIAN INSTITUTE OF SCIENCE EDUCATION AND RESEARCH TIRUPATI

(An Autonomous Institution of Ministry of Education, Govt. of India)

Permanent Campus: Srinivasapuram-Jangalapalli Village, Panguru (G.P) Yerpedu Mandal,
Tirupati, Andhra Pradesh – 517 619.

NIQ No: 14/IISER/Tirupati/NIQ/2025-26

Date: 05/12/2025

NOTICE INVITING QUOTATION

Item rate sealed quotation are invited by the undersigned on behalf of Director IISER Tirupati for the following work.

Sl. No	Name of Work	Time period of contract	Start Date of Bid	End Date & time of Bid	Opening Date & time of Bid
1	Rewinding & servicing of the existing sump pumps and WTP & UG pumps and replacement of light fittings at IISER Tirupati Permanent Campus, Yerpedu, Tirupati.	21 Days	05.12.2025	11.12.2025 at 03:00 p.m.	11.12.2025 at 03:30 p.m.

Quotation can be obtained from IISER Tirupati website <http://www.iisertirupati.ac.in/tenders/>

TERMS AND CONDITIONS

- 1) No advance payment shall be made by IISER Tirupati.
- 2) Applicants quoting for this work should be a registered “**Electrical Contractor**” in CPWD/ AP state PWD/ MES/ Railways/ Autonomous bodies, or an agency with valid GST registration and should have executed Electrical works in any government organization. The proof of the work experience should be submitted along with the quotation, without the proof of work experience the bids will be summarily rejected.
- 3) **Agency must visit the site before quoting the NIQ to understand the Scope of Work.**
- 4) Time period for completion of work shall be **21 (Twenty-One) Days** from the date of placing the confirmed order by IISER Tirupati. The act of backing-out after quotation will debar such agencies for participating in future quotations of IISER Tirupati. Bidder may e-mail queries on engineering@iisertirupati.ac.in or submit to the IISER Tirupati office in hard copy on all working days before a day of the submission date of quotation.
- 5) All agencies need to submit their quotation in hard copy in a sealed envelope to this office by suitable means on and before 3 PM on 11/12/2025. The quotation received after the date & time specified above shall not be accepted. Any delays, postal delays, etc. will not be entertained. Agency should quote for all the items in the BOQ. The bid shall be submitted in the original bid document (as issued by the IISER Tirupati) super scribing the name of work. Quotations will be opened on the same day

V. Jayaraman





i.e., 11/12/2025 at 3.30 PM in the presence of bidder or their authorized representatives if any. The offer of the firm should be commercially clear including acceptance of all terms and conditions without assigning any reasons/conditions.

- 6) Quoted rates should be inclusive of the cost of all the materials, labour cost, octroi, duties, cost of sample, and fees towards testing of materials in labs, royalties, GST, etc. Nothing extra shall be paid.
- 7) The successful agency shall make its arrangement for all Tools & tackles for work etc. complete in view of completion of work. Electricity shall be provided free of cost to agency at one source, agency should make own arrangement to safely tap of power from source to work location.
- 8) TDS and other applicable taxes and cess will be deducted from the bills as of the work.
- 9) **Security deposit @ 2.5 %** shall be recovered at source and refunded after satisfactory completion of **DLP of (12) Twelve months.**
- 10) Specification for the work to be carried out as per BOQ, latest CPWD specification, IS specifications & as per instruction of IISER Tirupati wherever CPWD/IS specification is not available.
- 11) The contractor shall ensure that minimum wages should be paid to the labour's and employees in accordance with labour laws.
- 12) The contractor should submit measurements and abstract sheets to IISER TIRUPATI for the payments within 30 days after completion of the work.



V. Jayaram

Executive Engineer (E), IISER Tirupati
On behalf of Director IISER, Tirupati

Copy to:

1. The Registrar, IISER Tirupati.
2. Joint Registrar F & A.
3. Assistant Engineer Electrical.




SCHEDULE OF QUANTITIES

Name of the Work: Rewinding & servicing of the existing sump pumps and WTP & UG pumps and replacement of light fittings at IISER Tirupati Permanent Campus, Yerpedu, Tirupati.

S.No.	Item Description	Unit	Qty	Rate	Amount
1	Repair and Servicing of 400 Cum/hr capacity Everest Blowers for STP-2 Academic zone area Model No.5175 including replacement of 22306 bearings, oil seals, gear oil, bushes and packings required accessories etc., with complete working in good condition as required. (Location: STP-2 Area).Rate is inclusive of all taxes, transportation nothing extra shall be paid.	Job	1		
2	Rewinding and Servicing of 7.5HP submersible dewatering Sewage Model No.5500CW pump including replacement of bearings, oil seals, bushes and other required accessories etc., with complete working in good condition as required. Without mechanical seal & Impeller (Make: Kirloskar Brothers, Location: WTP Area). Rate is inclusive of all taxes, transportation nothing extra shall be paid	Job	2		
3	Rewinding and Servicing of 7.5HP open well submersible pump Model No.CSM-46 including replacement of bearings, oil seals, bushes and other required accessories etc., with complete working in good condition as required. (Make : CRI , Location : UG Water Sump).Rate is inclusive of all taxes, transportation nothing extra shall be paid	Job	2		
4	Rewinding and Servicing of 5 HP open well submersible pump Model No.CSM-2 including replacement of bearings, oil seals, bushes and other required accessories etc., with complete working in good condition as required. (Make : CRI , Location : UG Water Sump).Rate is inclusive of all taxes, transportation nothing extra shall be paid	Job	2		
5	Rewinding, Repair and Servicing of 5HP open well submersible pump set Model No.ASM6N-S including replacement of bearings, oil seals, bushes and other required accessories etc., with complete working in good condition as required. (Make : Aquatex , Location : UG Block Water sump).Rate is inclusive of all taxes, transportation nothing extra shall be paid	Job	1		



S.No.	Item Description	Unit	Qty	Rate	Amount
6	Supply and fixing of single phasing preventor, series SM-301, operated voltage 415VAC, 47Hz to 63 Hz, catalogue no. MA51BC in existing starter panel with required connections etc. Male: GIC. Rate is inclusive of all taxes nothing extra shall be paid	Each	5		
7	Servicing and cleaning of the 100 Litres Electric storage water heater closed type kept in central store room at IISER Tirupati campus. During service if any spare parts replacement to be paid separately (Make: Racold, Model No. RACOLD ESWH(PLT)-100/2018). Rate is inclusive of all taxes, transportation nothing extra shall be paid.	Job	8		
8	Supply of following belts required for Toilet Exhaust fans with relevant IS standards as required. Make: ESCON or Equivalent				
8.1	Belt No: A54	Each	10		
8.2	Belt No: A62	Each	5		
8.3	Belt No: A48	Each	30		
8.4	Belt No: A53	Each	4		
8.5	Belt No: A61	Each	4		
9	Supply of infrared motion sensor having high performance, suitable for connected load upto 8 amp, for mounting height upto 2.2 to 4 meter and for 5-meter diameter coverage area along with necessary fixing arrangements etc. complete as required. Proposed model SIBASS Electric Model No. SE-ES-P19A Surface Mounted/equivalent.	Each	50		
10	Supplying & laying of PVC insulated and PVC sheathed / XLPE 3x2.5 sqmm copper armoured cable power cable of 1.1 KV grade as required with required accessories for laying.	meter	100		
11	Supply and fixing of MCB Distribution Board Weatherproof IP 65 Suitable for Outdoor use Waterproof PVC Enclosure with Cover Against Water Splash Outdoor IP65 (2 Way Mcb Box) with pvc glands as required for connection	Each	1		
12	Supply, Installation, Testing and Commissioning of 4 x 60 W LED Flood light fitting having colour temperature not less than 4000K, system lumen output not less than 19000 lumens and system wattage 240 Watts, built in electronic driver with surge protection not less than 4 KV etc. on existing pole as required. Klite Aston 4 or equivalent. The Fitting should have 5 Years warranty.	Each	3		

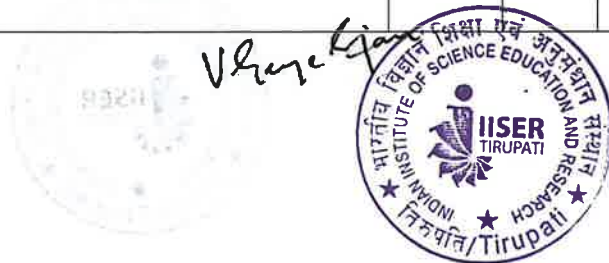



S.No.	Item Description	Unit	Qty	Rate	Amount
13	Supply and installation of 10 KVA Single Phase Servo type Air Cooled Voltage Stabilizer for treadmill equipments purpose.				
13.1	Input: 180-270V AC; Input: Single Phase, Output: Single Phase, Output: 230V AC; Type – OA with O/V Cut off. Make: DELTEK/SERVO MAX/SERVO POWER or Equivalent. The Equipment should have 1 Year warranty.	Each	2		
14	Supply, installation, Testing & commissioning of Dual source three phase Post/Pre-Paid Energy Meters Direct current 60A. Class 1.0. with RS485. with required connections as required in the Existing panel at residential area. Make: El measure & Model No. PE5120. This meter should have 1-year warranty along with calibration reports. Rate is inclusive of all taxes nothing extra shall be paid	Each	5		
15	Supply, installation, Testing & commissioning of three phase Energy Meters Imax 60A. Class 1.0 (800 Pulses/Unit) with RS232. with required connections as required in the Existing panel at residential area. Make: Secure & Model No. Sprint 350. This meter should have 1-year warranty along with calibration reports. Rate is inclusive of all taxes nothing extra shall be paid	Each	5		
				Total(Rs.)	

Total Amount in Words:

Note: - Amount quoted above shall be inclusive of GST, transportation, statutory, labour fees etc. nothing extra shall be payable.

V. Jayaram



Executive Engineer (E), IISER Tirupati

On behalf of Director IISER, Tirupati

(To be filled by the Agency)

Signature of the bidder :

Name of the Agency :

Mobile Number & E-mail ID :

Correspondence Address :